

UNIVERSITY OF RUHUNA

Faculty of Engineering

End-Semester 4 Examination in Engineering: December 2016

Module Number: CE4311 Module Name: Engineering Geology and Soil Mechanics

(Old Syllabus)

[Three Hours]

[Answer all questions, each question carries twelve marks]

[Use separate books to answer each section]

SECTION - A

- Q1. Figure Q1 shows a geological map of an area.
- a) Draw the structure contours for the bed A, B, C and F (Consider all the bed outcrops under same letter). [3.0 Marks]
 - b) Find the true dip angle and dip direction of each bed (A, B, C and F) [2.0 Marks]
 - c) Find the true dip and dip angle of the fault [2.0 Marks]
 - d) Draw a cross section along the line XY using vertical exaggeration as 1. [3.0 Marks]

(Note: The geological map and the geological cross-section should be attached to the answer book)

- Q2.
- a) What are the main rock types? Briefly describe them with formations and some examples of such rocks. [4.5 Marks]
 - b) Give a brief description on rock cycle with a sketch showing basic processes which operate within it [1.5 Marks]
 - c) Briefly describe the main types of rock weathering processes [2.0 Marks]
 - d) Describe soil forming process and soil types based on formation [2.0 Marks]

SECTION - B

- Q3. A layer of silty sand extends below the ground surface to a depth of 4.0 m. Below the silty sand layer is soft clay of thickness 6.0 m. A stratum of dense sand of thickness 4.0 m is under the soft clay layer. An impermeable bed rock is 14.0 m below the ground surface. The water table is 2.0 m below the ground surface.

The dry unit weight and saturated unit weight of silty sand are 17 kN/m^3 and 18.5 kN/m^3 , respectively. The saturated unit weights of clay and dense sand are 14

kN/m³ and 20 kN/m³, respectively. The coefficient of lateral earth pressure (at rest) of clay is 0.4. The unit weight of water is 9.81 kN/m³.

- a) Draw the total stress, pore water pressure and effective stress distribution to a depth of 14.0 m from the ground surface. [4.5 Marks]
- b) A uniformly distributed fill load of 80 kN/m² is placed on the surface of this area.
- i) What would be the effective vertical stress at middle of the clay layer immediately after fill has been placed? [1.5 Marks]
 - ii) What would be the effective vertical stress at middle of the clay layer many years after fill has been placed. [1.0 Marks]
 - iii) What would be the pore water pressure at middle of the clay layer immediately after fill has been placed? [1.0 Marks]
 - iv) What would be the pore water pressure at middle of the clay layer many years after fill has been placed? [0.5 Marks]
 - v) What would be the total lateral stress at middle of the clay layer immediately after fill has been placed? [2.0 Marks]
 - vi) What would be the total lateral stress at middle of the clay layer many years after fill has been placed. [1.5 Marks]

Q4. In order to select a suitable soil for a road embankment construction, a Standard Proctor Compaction test was performed in the laboratory on a soil sample obtained from a borrow pit and test results are depicted in Table Q4.1. The volume of the mold is 944 cm³. You may use the unit weight of water as 9.81 kN/m³.

- a)
 - i) Draw the compaction curve and determine the maximum dry unit weight and the optimum moisture content of the soil. [3.0 Marks]
 - ii) Draw the phase diagram and derive following equation with usual notations.

$$\gamma_d = \frac{(1 - A)G_s\gamma_w}{(1 + wG_s)}$$
[1.0 Marks]
 - ii) Assuming that specific gravity of the soil is 2.65, draw curves for 0 % and 10 % air voids line; hence estimate the air content corresponding to the maximum dry unit weight. [2.5 Marks]
- b) Due to heterogeneous nature of the soil at the borrow pit, site engineer has decided to develop a standard compaction curve for the same soil at the site. Even though standard Proctor hammer is available at the site, the available mould size is different from standard mold size. The volume of the mold at the site is 1500 cm³. As you are a junior engineer at the site, how do you use the available equipment to develop the standard Proctor compaction curve? Justify your answer with suitable calculations.

- [1.5 Marks]
- c) Briefly describe with the aid of sketches 4 factors which affect the field compaction.
- [2.0 Marks]
- d) As an quality assurance, contractor has performed Sand Cone test in each compacted layer of the embankment and test results of a particular layer are depicted in Table Q4.2. Hence, estimate the degree of compaction of the soil.
- [2.0 Marks]
- Q5. Series of laboratory tests have been conducted to determine the physical properties of a particular soil.
- a) i) Briefly describe the sample preparation procedure for the hydrometer analysis test?
- [2.0 Marks]
- ii) Why is it important to apply dispersing agent correction for the hydrometer reading? Briefly describe the test procedure to determine the dispersing agent correction.
- [2.0 Marks]
- b) Plasticity characteristics of the soil were determined using Atterbeg Limit test and test results are presented in Table Q5.1
- i) What would be the Liquid Limit of the soil?
- [2.5 Marks]
- ii) What would be the Plastic Limit of the soil?
- [1.0 Marks]
- iii) Hence, determine the Plasticity Index of the soil.
- [0.5 Marks]
- c) Particle size distribution curve of the above soil is shown in Figure Q5.1.
- i) Classify the soil according to Unified Soil Classification System.
- [3.0 Marks]
- ii) Briefly explain the possibility of use above soil as a liner material in an engineered landfill.
- [1.0 Marks]

Table Q4.1 Standard Proctor Compaction test results

Water content (%)	6.35	7.97	10.25	10.37	18.89	19.03
Mass of soil (g)	1644	1843	1993	1998	1938	1873

Table Q4.2 Sand Cone test results

Density of sand (g/cm ³)	1.34
Weight of sand required to filled the cone (g)	396
Determination of Water Content	
Weight of can (g)	9.98
Weight of can + Wet soil (g)	112.85
Weight of can + Dry soil (g)	98.87
Determination of Dry Unit Weight	
Weight of sand + Jar before use (g)	7315
Weight of sand + Jar after use (g)	6034
Weight of container (g)	144.8
Weight of container + soil (g)	1385

Table Q5.1(a) Atterbeg Limit test results - Liquid Limit

Test No.	Liquid Limit					
	1	2	3	4	5	6
No. of Blows	51	46	37	28	20	12
Can No.	1	2	3	4	5	6
Mass container (g)	42.31	27.00	27.07	27.32	27.22	27.85
Mass of soil + container (g)	52.69	38.37	41.75	36.95	38.10	54.46
Mass of oven dried soil + container (g)	49.35	34.70	36.85	33.66	34.36	44.87

Table Q5.1(b) Atterbeg Limit test results - Plastic Limit

Can No.	Plastic Limit		
	1	2	3
Mass container (g)	15.31	15.33	17.29
Mass of soil + container (g)	23.05	23.24	25.46
Mass of oven dried soil + container (g)	21.32	21.43	23.43


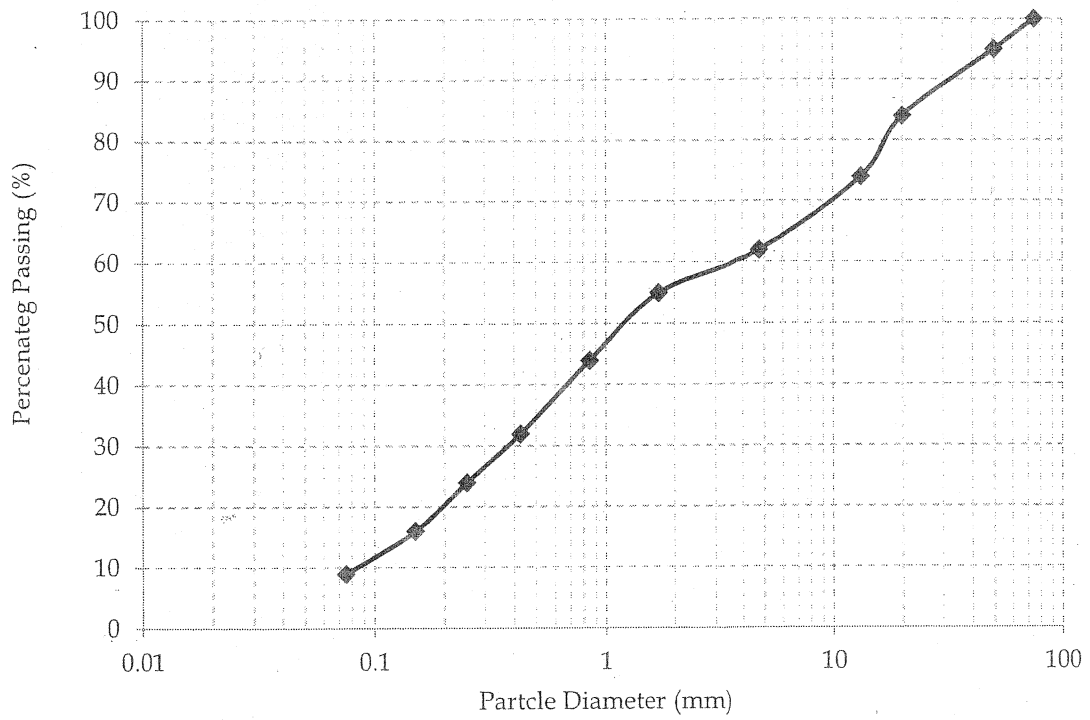


Figure Q5.1 - Particle size distribution curve

Table Q4: USCS


Description			Group symbol	Laboratory criteria			Notes	
				Fines (%)	Grading	Plasticity		
Coarse grained (more than 50% larger than No. 200 US sieve size)	> 0.075 mm	Well graded gravels, sandy gravels, with little or no fines	GW	0 - 5	$C_u > 4$ $1 < C_c < 3$		Dual symbols. If 5 - 12 % fines.	
		Poorly graded gravels, sandy gravels, with little or no fines	GP	0 - 5	Not satisfying GW requirements		Dual symbols if above A-line and $4 < PI < 7$	
		Silty gravels, silty sandy gravels	GM	> 12		Below A-line or $PI < 4$		
		Clayey gravels, clayey sandy gravels	GC	> 12		Above A-line and $PI > 7$		
	> 0.075 mm	Well graded sands, gravelly sands, with little or no fines	SW	0 - 5	$C_u > 6$ $1 < C_c < 3$			
		Poorly graded sands, gravelly sands, with little or no fines	SP	0 - 5	Not satisfying SW requirements			
		Silty sands	SM	> 12		Below A-line or $PI < 4$		
		Clayey sands	SC	> 12		Above A-line and $PI > 7$		
		< 0.075 mm	Silts and Clays (Liquid Limit less than 50)	Inorganic silts, silty or clayey fine sands, with slight plasticity	ML	Use plasticity chart		
				Inorganic clays, silty clays, sandy clays of low plasticity	CL	Use plasticity chart		
Organic silts and organic silty clays of low plasticity	OL			Use plasticity chart				
Silts and Clays (Liquid Limit greater than 50)	Inorganic silts of high plasticity		MH	Use plasticity chart				
	Inorganic clays of high plasticity		CH	Use plasticity chart				
	Organic clays of high plasticity		OH	Use plasticity chart				
	Highly organic soils		Pt	Peat and other highly organic soils				

Plasticity Chart for USCS

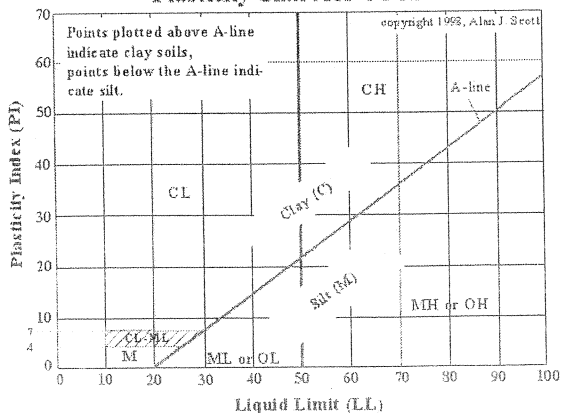

Primary letter		Secondary letter	
G	Gravel	W	Well graded
S	Sand	P	Poorly graded
M	Silt	M	With non-plastic fines
C	Clay	C	With plastic fines
O	Organic soil	L	Of low plasticity (LL < 50)
Pt	Peat	H	Of high plasticity (LL > 50)

Figure Q1: Geological Map

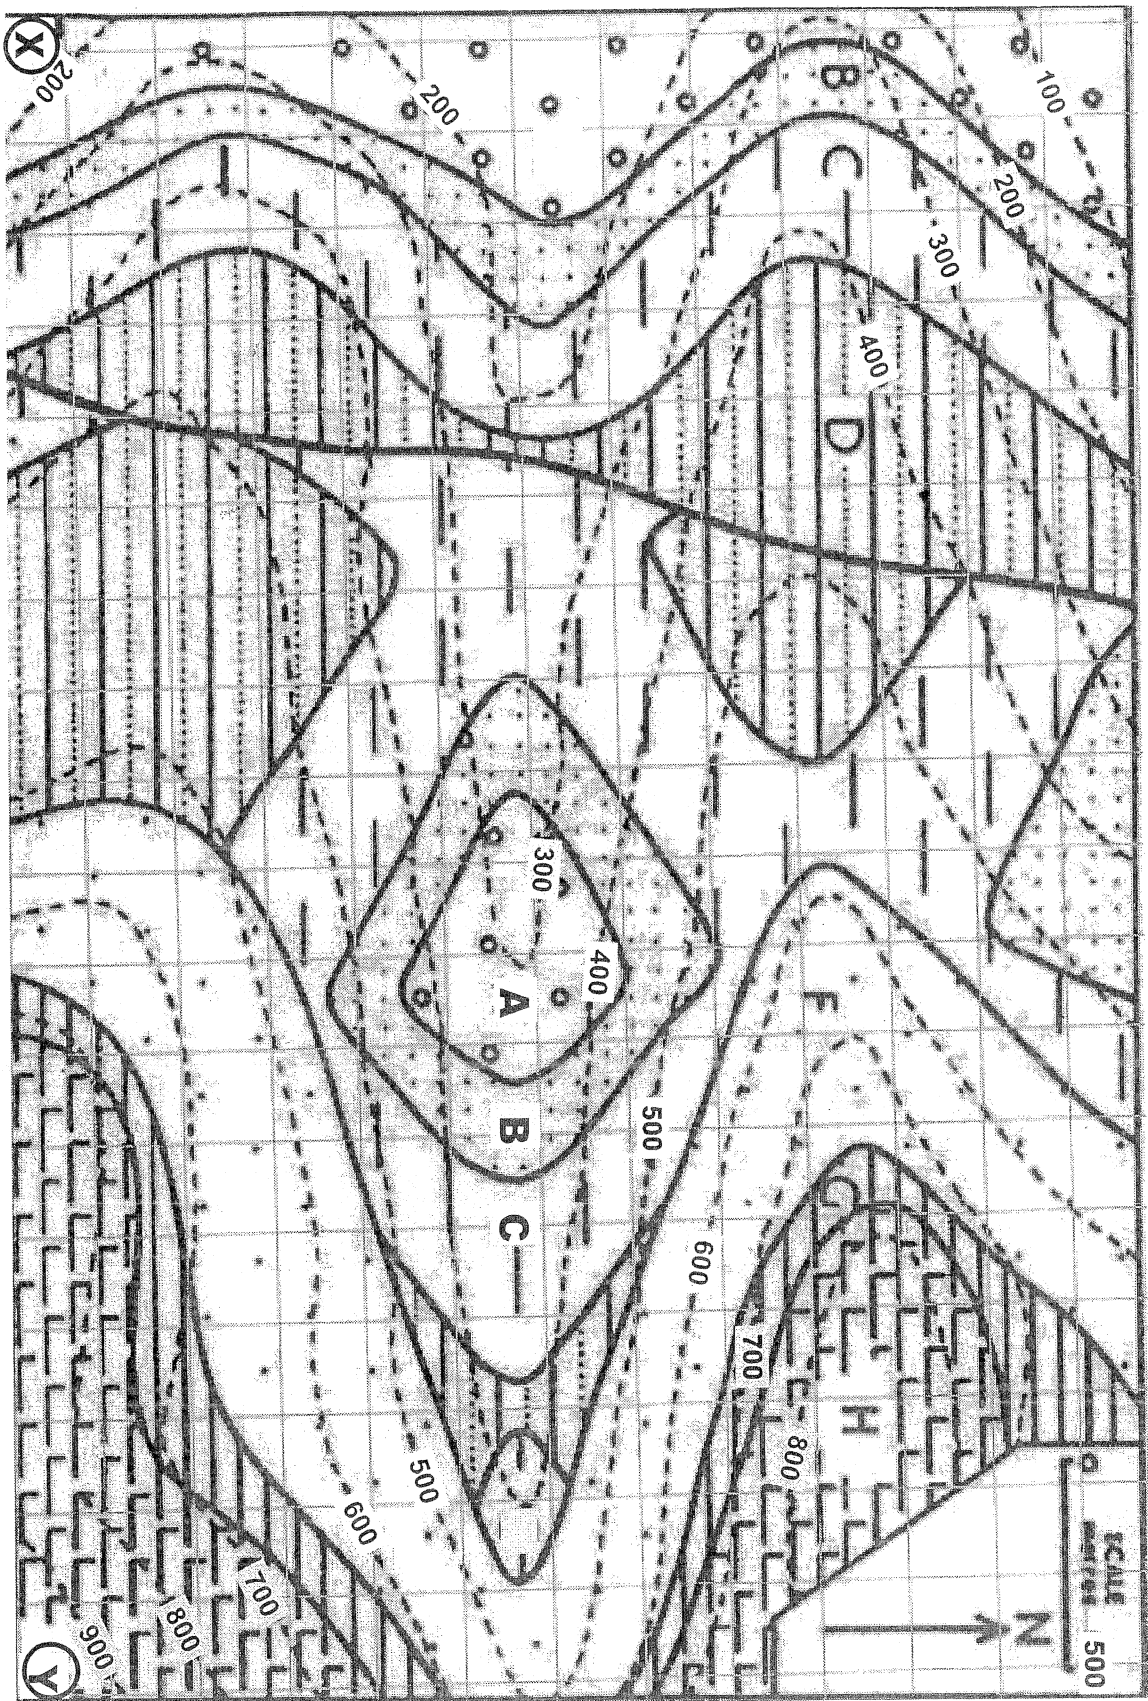

Index No: