



UNIVERSITY OF RUHUNA

Faculty of Engineering

End-Semester 2 Examination in Engineering: March 2026

Module Number: ME2302

Module Name: Fundamentals of Materials
and Manufacturing Engineering (C-23)

[Two Hours]

[Answer all questions, each question carries 10 marks]

Part B

Q1. a) Name the Figures [(a) to (h)] shown in Table Q1.

[4.0 Marks]

- b) i. What is a sine bar?
ii. Explain the procedure to use it using sketches.
iii. Discuss the limitations of the use of a sine bar.

[3.0 Marks]

- c) You are asked to measure the V block angle shown in Figure Q1. What is the instrument you are going to use for that? Explain the procedure used to measure the angle, supported by a neat sketch.

[3.0 Marks]

Q2. Most metallic materials exhibit a highly ordered crystalline structure, where atoms are arranged in densely packed, repeating, and symmetrical patterns known as unit cells.

- a) Illustrate the crystallographic planes and directions corresponding to the following Miller indices within a cubic unit cell. Provide a separate, clearly labeled sketch for each index.
i. Planes: (100) and (123)
ii. Directions: [111] and [102]

[2.0 Marks]

- b) Differentiate between the concepts of **planar density** (PD) and **liner density** (LD) as applied to a crystal unit cell.

[2.0 Marks]

- c) Silver (Ag) is a lustrous white metal with a face-centered cubic (FCC) structure, which gives it excellent ductility and malleability. Calculate the liner density (LD) of Silver in the [100], [110] and [111] directions, given that the atomic radius (R) of the Silver is 0.15 nm. Include neat sketches wherever possible. Based on your results, identify the **close-packed direction** for the face-centered crystal structure.

[4.0 Marks]

- d) Define the atomic packing factor (APF) of a crystal lattice and discuss how it differs from the theoretical density of the material.

[2.0 Marks]

- Q3.** The Iron-Carbon phase diagram is a fundamental tool for understanding the microstructure and properties of steels and cast irons.
- a) Referring to the standard $Fe - Fe_3C$ equilibrium diagram (**Figure Q3**), answer the following:
 - i. Determine the maximum solubility of carbon (C) in ferrite and austenite phases.
 - ii. Identify the eutectic composition and eutectic temperature.
 - iii. Write phase reaction equations for eutectic and eutectoid transformation during cooling.

[3.0 Marks]
 - b) Calculate the following for the steel alloy containing 98.75 wt% of Fe and 1.25 wt% of C at a temperature **just below the eutectoid** (You may use the data provided in **Figure Q3**).
 - i. The weight percentages of total ferrite and cementite phases.

[2.0 Marks]

 - ii. The weight percentages of proeutectoid cementite ((Fe_3C) and pearlite phases.

[2.0 Marks]

 - iii. The weight percentage of eutectoid cementite ((Fe_3C) phase.

[1.0 Mark]
 - c) Sketch the microstructures of the steel alloy described in part (b) (containing 98.75 wt% of Fe and 1.25 wt% of C) at 1100 °C and 600 °C during equilibrium cooling. All the phase regions should be clearly labeled.
- [2.0 Marks]
- Q4.**
- a) Composite materials are widely used in various engineering applications due to their high strength-to-weight ratio.
 - i. Classify the composite materials according to their **reinforcement geometry**, and briefly describe each classification by providing an example.



[3.0 Marks]

 - ii. State **four** (04) functions of the matrix in composite.

[2.0 Marks]
 - b) As an engineering undergraduate, briefly discuss the importance of studying the properties of engineering materials.
- [2.0 Marks]
- c) Sketch a typical stress-strain curve for a ductile metallic material and label all important points and regions. Based on your diagram, define the following terms:
 - i Stress
 - ii Strain
 - iii Young's modulus

[3.0 Marks]

Table Q1

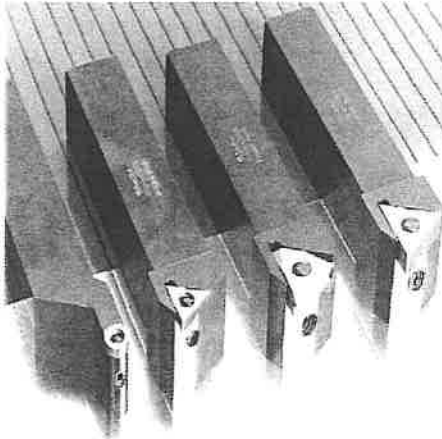		
(a)	(b)	(c)
		
(d)	(e)	(f)
		
(g)	(h)	

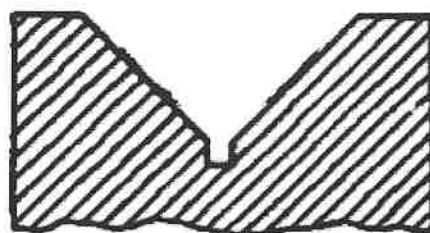


Figure Q1 V Block

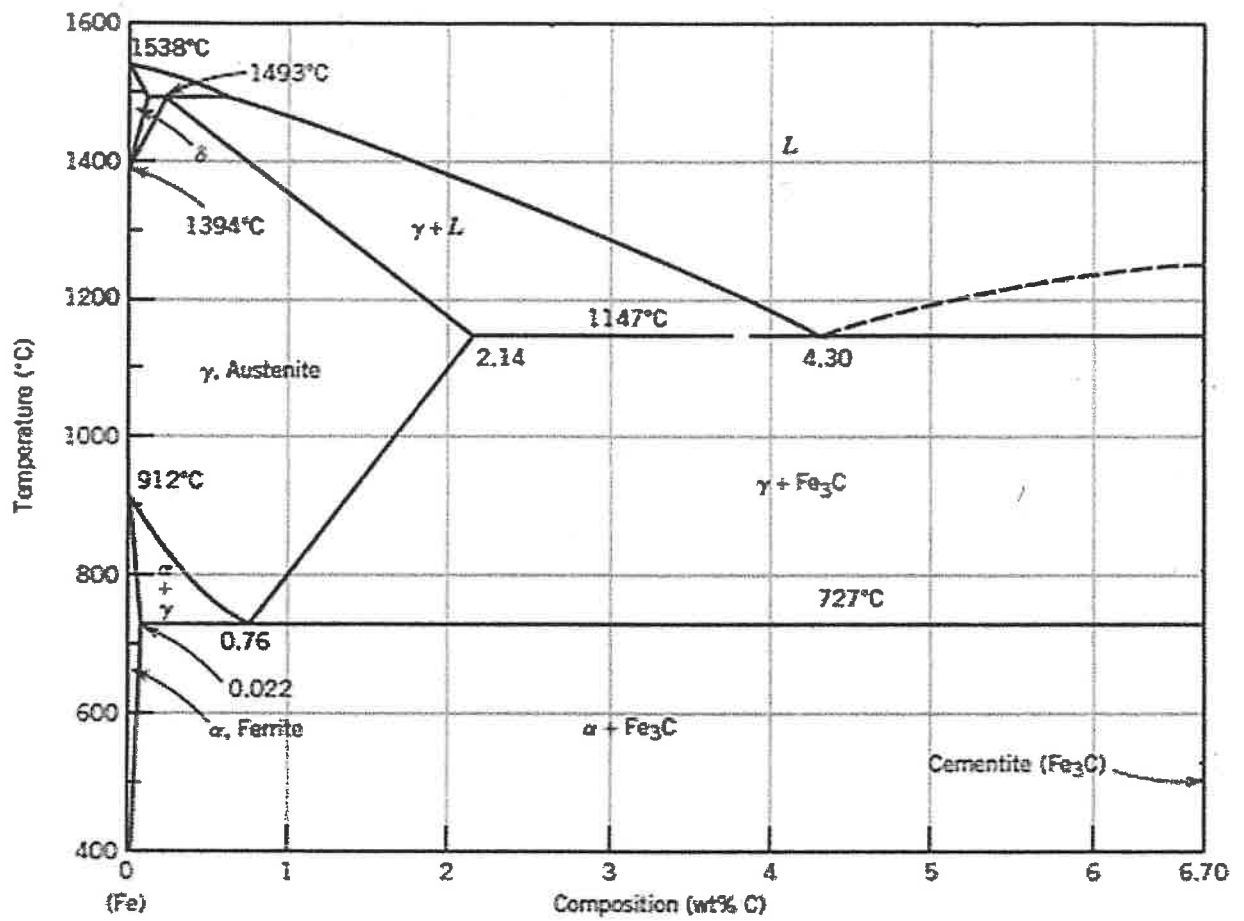


Figure Q3

End of the paper.